

Jeep JL JBL Sound Bar Upgrade Kit

Model # JL-JBLSB 6.5



WARNING

This product can expose you to chemicals including vinyl chloride and lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Pre-Assembled Speaker Kit Includes

- 2 - JBL 6.5" Premium Club Series Speakers with Factory Plugs
- 2 - JL Custom MDF Speaker Mounting Plates
- 2 - High Density Foam Spacers and 2 Foam Speaker Gaskets
- 2 - 4" Tie Straps

Installation Instructions

****NO CUTTING REQUIRED****

Instructions pictures were taken with the Sound Bar Removed from the Jeep. This was for photography purposes only. The Sound Bar DOES NOT need to be removed for Installation.

Factory Speaker Removal & Prep

Instructions are shown for Driver Side Speaker
Repeat same procedure for Passenger Side

1. Using a T30 torx bit, remove Factory Speaker Grills (4 screws). Make sure to save the Grills and Screws for the future, they will not be used for this installation. See pic #1
2. Remove the Foam Pad and set aside. It will not be reinstalled for this application. See pic #2
3. Using a T15 torx bit, remove the 2 screws that secure the Small Factory Speaker (Tweeter). Re-install the Tweeter screws for safe keeping, they will not be used for this installation. See pic #3
4. Pull Tweeter down so that you can see the Plug. Using a small screwdriver push the Locking Tab down and away from you to release the Plug as shown in pic #4.
5. Do not remove the Speaker Port. It can remain in place. Shown by yellow circle in picture #3
6. Use a Tie Strap to secure the Tweeter Speaker Plug. This will ensure that it won't move and rattle after installation is complete as shown in pic #5.



5

Any Questions or Comments,
call Bob 610-358-1886

6. Using a T15 bit, remove the 3 Screws that secure the Large Speaker (woofer). Re-install the screws into the Sound Bar without the Speakers as shown in picture #6.
 7. Use a small screwdriver to press Locking Tab down and away to release Plug as shown in pic #7
 8. Install the Speaker Systems into the Jeep. Pay attention to the Driver Side and Passenger Side as shown in picture #8.

9. Plug the Speaker System into the Soundbar as shown in picture # 9.

10. While holding the Mounting Plate close to the Sound Bar, get all 4 Screws started a few turns as shown in pic #10.

11. Tighten Screws up evenly, tighten each screw 3 or 4 turns. When Gasket touches the Sound Bar, ensure that Gasket is seated evenly before snugging up all of the Screws. Stop when the Screws feel tight.

Do Not Over-Tighten

12. After 3 or 4 days, the Gasket will have had time to seat. Go back and re-check the Screws. Re-tighten if necessary.

Recommended Radio Settings :

Bass 0 Mid 0 Treble 0

These settings will give the most accurate sound from the Speakers.

An optional setting is

Bass +3 Mid 0 Treble +3

Or adjust to taste



Driver Side

Passenger Side



Jeep JL JBL Sound Bar Upgrade Kit

Model # JL-JBLSB 6.5



This product can expose you to chemicals including vinyl chloride and lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

WARNING

Pre-Assembled Speaker Kit Includes

- 2 - JBL 6.5" Premium Club Series Speakers with Factory Plugs
- 2 - JL Custom MDF Speaker Mounting Plates
- 2 - High Density Foam Spacers and 2 Foam Speaker Gaskets
- 2 - 4" Tie Straps

Installation Instructions

****NO CUTTING REQUIRED****

Instructions pictures were taken with the Sound Bar Removed from the Jeep. This was for photography purposes only. The Sound Bar DOES NOT need to be removed for Installation.

Factory Speaker Removal & Prep

Instructions are shown for Driver Side Speaker
Repeat same procedure for Passenger Side

1. Using a T30 torx bit, remove Factory Speaker Grills (4 screws). Make sure to save the Grills and Screws for the future, they will not be used for this installation. See pic #1
2. Remove the Foam Pad and set aside. It will not be reinstalled for this application. See pic #2
3. Using a T15 torx bit, remove the 2 screws that secure the Small Factory Speaker (Tweeter). Re-install the Tweeter screws for safe keeping, they will not be used for this installation. See pic #3
4. Pull Tweeter down so that you can see the Plug. Using a small screwdriver push the Locking Tab down and away from you to release the Plug as shown in pic #4.
5. Do not remove the Speaker Port. It can remain in place. Shown by yellow circle in picture #3
6. Use a Tie Strap to secure the Tweeter Speaker Plug. This will ensure that it won't move and rattle after installation is complete as shown in pic #5.



Any Questions or Comments,
call Bob 610-358-1886

6. Using a T15 bit, remove the 3 Screws that secure the Large Speaker (woofer). Re-install the screws into the Sound Bar without the Speakers as shown in picture #6.
 7. Use a small screwdriver to press Locking Tab down and away to release Plug as shown in pic #7
 8. Install the Speaker Systems into the Jeep. Pay attention to the Driver Side and Passenger Side as shown in picture #8.

9. Plug the Speaker System into the Soundbar as shown in picture # 9.

10. While holding the Mounting Plate close to the Sound Bar, get all 4 Screws started a few turns as shown in pic #10.

11. Tighten Screws up evenly, tighten each screw 3 or 4 turns. When Gasket touches the Sound Bar, ensure that Gasket is seated evenly before snugging up all of the Screws. Stop when the Screws feel tight.

Do Not Over-Tighten

12. After 3 or 4 days, the Gasket will have had time to seat. Go back and re-check the Screws. Re-tighten if necessary.

Recommended Radio Settings :

Bass 0 Mid 0 Treble 0

These settings will give the most accurate sound from the Speakers.

An optional setting is


Bass +3 Mid 0 Treble +3

Or adjust to taste



Driver Side

Passenger Side

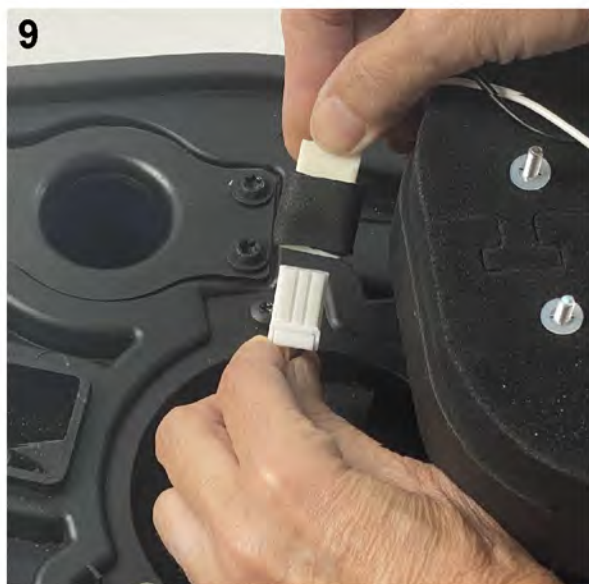

9



10

Questions or Comments
 call Bob, 610-358-1886